



## Scanning with Simplicity



### SAVEO-RGDPTL-H2D-BT Quick Start Guide

#### Package contents

- 1 x SAVEO-RGDPTL-H2D-BT scanner
- 1 x Charging Cradle
- 1 x Micro USB cable
- 1 x Quick Guide

#### Contact us at:

Email:  
[inquiry@saveoscan.com](mailto:inquiry@saveoscan.com)

US: +1-720-257-7070

UK: +44-208-099-8071

Web:  
[www.saveoscan.com](http://www.saveoscan.com)

IRE: +353-1-685-4600

#### Limited Warranty

Saveo Scan provides a 3-year limited warranty on SAVEO-RGDPTL-H2D-BT. This warranty does not cover any product which has been subject to improper use, neglect or unauthorized repair or installation. This warranty does not cover consumable parts. (Cables & batteries are consumables.)

#### Safety information

- \* Don't put scanner in places of excessively high temperature, such as exposure to direct sunlight
- \* Don't use scanner in extremely humid conditions or in conditions of extreme temperature change
- \* The rechargeable battery is permanently built into the product and cannot be replaced.
- \* Never damage the rechargeable battery. Damaging the casing of the rechargeable battery might cause explosion or fire!



#### Connecting via Bluetooth


Scan the Wireless Bluetooth Pairing barcode below in order.

**Please Note:** Device will enter Pairing mode, 5 seconds after scanning the below code. Alternatively, you can hold the scan button down for 10 seconds to enter pairing mode..



#### Enable Bluetooth on your device

Go to your phone's homescreen and find "Settings", then "Bluetooth" and turn Bluetooth on. Your device will search for available devices within range.

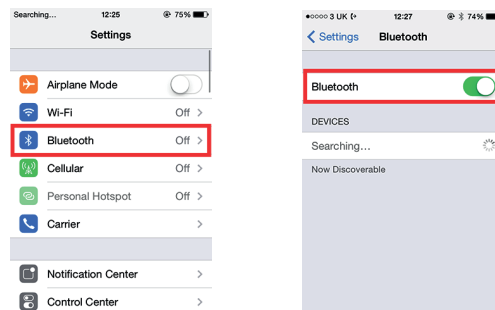

#### Select SAVEO-RGDPTL-H2D-BT\*0000\*\*\*\*\*to connect

Saveo Scan will appear as an external keyboard with a unique identifier serial number (SAVEO-RGDPTL-H2D-BTxxxxxx). Select scanner from "Available Devices" and wait for pairing process to complete.

Once "Connected" is displayed, your device is paired to the scanner. Your scanner is now ready to use.

#### Devices are now paired

**Please Note:** Devices only need to be paired once. When they are within Bluetooth range they will automatically attempt to connect to each other. If you wish to connect to another device it is recommended you first unpair this device.

#### Language Mode

US English (Default)



A0100

French



A0101



A0102

Turkish Q



A0103

Turkish F



A0104

Portugeuse



A0105

Spanish



A0106

Russian



A0107

Italian



A0108

#### Power Saving Mode

Power saving mode is enabled by default and will put the scanner to sleep after 1 minutes inactivity. To wake up the scanner simply press the trigger.

Below are the barcodes to modify power saving times.

##### 3 Minute

Enter Power Saving Mode after 3 minutes inactivity



%%05

##### 2 Minute

Enter Power Saving Mode after 2 minutes inactivity



%%04

##### 90 Seconds

Enter Power Saving Mode after 90 seconds inactivity



%%03

##### 60 Seconds (Default)

Enter Power Saving Mode after 60 seconds inactivity



%%02

##### 30 Seconds

Enter Power Saving Mode after 30 of inactivity



%%01

#### Scanning Mode

##### Direct Scan Mode (Default)

Data is transmitted instantly to your device, upon a scan.



##### Memory Scan Mode

Data is stored and transmitted to device upon a upon request using the command codes below.



#### Memory Scan Command Codes



#### Bluetooth Connection Protocol

